


Gasoline Generator Datax

GENERATOR MODEL		HN105Q	
	Generator Specifications	PRP	ESP
	Power	kW/kVA	10.5 / 13.1 13.5 / 16.8
	Rated Speed	r.p.m.	3600
	Available Voltages	V	220~380
	Frequency	Hz	50
	Phase		1-PH/3-PH
	Power Factor	Cos∅	1.0/0.8
	Fuel Type		92#Gasoline
	Auxiliary Voltage	DC	12V
	Output		8.3A

DIMENSION			OPEN TYPE	SILENT TYPE
	Length (L)	mm	900	/
	Width (W)	mm	600	/
	Height (H)	mm	600	/
	Net	Kg	165	/
	Gross	Kg	175	/

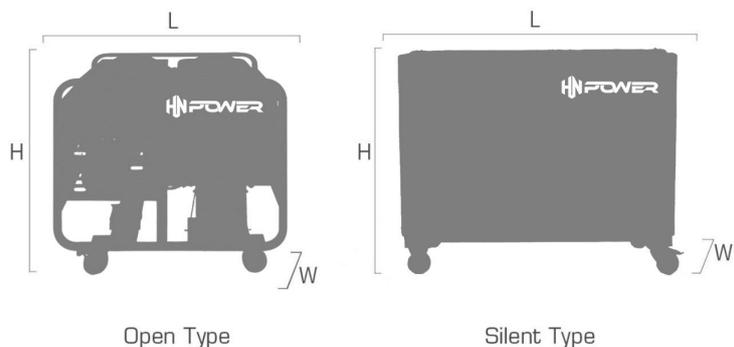

ENGINE	HAONENG
Engine Model	V870
Prime Power/Speed	13.1 / 1500 [kva/rpm]
Standby Power/Speed	16.8 / 1500 [kva/rpm]
Voltage Frequency	50HZ
Bore x Stroke	77 × 66 mm
Displacement (cc)	870

Engine Specifications

ENGINE	HAONENG
Voltage Regulation System	AVR
Start Type	Electrical
Fueltank Capacity(L)	30L
Protection System	Low Oil Alarm
Sound Level (dB (A)/7m)	72
Emission	GB 20891-2014 Stage II



Weights and dimensions based on standard products. Technical data described in this catalogue correspond to the available information at the moment of printing. The illustrations and images are indicative and may not coincide in their entirety with the product. Industrial design under patent.